





8000 SERIES DEVICE OUTSIDE TRIMS

86P SERIES – PULL PLATE (FOR WIDE STILE EXIT DEVICES)

Features

- Non-handed
- Easily install with exit device.
- Trim has through-bolts to the device chassis directly for more security and durability.
- It fits 1-3/4"(44mm) door standard. For 2"(51mm) and 2-1/4"(57mm) thick door or the shim-mounted exit device, specify the door thickness when ordering.
- Finishes: US3(605), US4(606), US10(612), US10B(613), US26(625), US26D(626), US28(689), US32D(630)

Models and Functions


Operation Options <i>*Dummy trim is not recommended for the fire device.</i>	Key Locks & Unlocks Thumbpiece 	Lever Always Active (No Cylinder) 	Key Retracts Latchbolt 	Pull When Dogged 
	Classroom	Passage	Night Latch	Dummy
Function	Classroom	Passage	Night Latch	Dummy
Trim Designation	Cylinder Pull Plate with Thumbpiece	Blank Pull Plate with Thumbpiece	Cylinder Pull Plate	Dummy Pull Plate
Model Number & Use	86P-5A	86P-5B	86P-5C	86P-5D
	For Rim, Surface Vertical Rod and LBR Exit Devices Use			
	86P-6A	86P-6B	86P-6C	86P-6D
	For Concealed Vertical Rod Exit Devices Use			
Escutcheon Plate Size	14 1/16" x 3" x 3/32" (373mm x 76mm x 2mm)		14" x 3" x 3/32" (355mm x 76mm x 2mm)	
ANSI Function	05	15	03	02
Cylinder Type	1-1/4" Mortise	—	Rim	—

Note

- When need to meet key requirement, the trims may receive cylinders from other manufacturers.
- Cylinder is not furnished standard. Specify cylinder type (RC- Regular Cylinder, IC- Interchangeable Core, NC- No Cylinder) when the cylinder is required.
- To inquire or Order for 86P Series Trims, specify model series no., lever design no., function code, cylinder type and BHMA finish code.

For example:

86P-5 A-RC-626

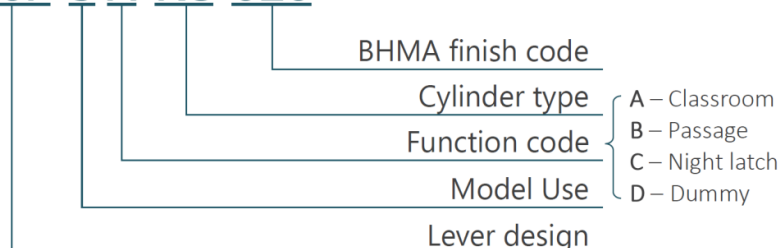





8000 SERIES DEVICE OUTSIDE TRIMS

84P SERIES – PULL PLATE (FOR NARROW STILE EXIT DEVICES)

Features

- Non-handed
- Easily install with exit device.
- Trim has through-bolts to the device chassis directly for more security and durability.
- It fits 1-3/4"(44mm) door standard. For 2"(51mm) and 2-1/4"(57mm) thick door or the shim-mounted exit device, specify the door thickness when ordering.
- Finishes: US3(605), US4(606), US10(612), US10B(613), US26(625), US26D(626), US28(689), US32D(630)

Models and Functions

Operation Options <i>*Dummy trim is not recommended for the fire device.</i>	Key Locks & Unlocks Thumbpiece 	Lever Always Active (No Cylinder) 	Key Retracts Latchbolt 	Pull When Dogged 
	Classroom	Passage	Night Latch	Dummy
Function	Cylinder Pull Plate with Thumbpiece	Blank Pull Plate with Thumbpiece	Cylinder Pull Plate	Dummy Pull Plate
Model Number & Use	84P-5A	84P-5B	84P-5C	84P-5D
	For Rim and Surface Vertical Rod Exit Devices Use			
	84P-6A	84P-6B	84P-6C	84P-6D
	For Concealed Vertical Rod Exit Devices Use			
Escutcheon Plate Size	14 11/16" x 1 25/32" x 3/32" (373mm x 45mm x 2mm)		14" x 1 25/32" x 3/32" (355mm x 45mm x 2mm)	
ANSI Function	05	15	03	02
Cylinder Type	1-1/4" Mortise	—	Rim	—

Note

- When need to meet key requirement, the trims may receive cylinders from other manufacturers.
- Cylinder is not furnished standard. Specify cylinder type (RC- Regular Cylinder, IC- Interchangeable Core, NC- No Cylinder) when the cylinder is required.
- To inquire or Order for 86P Series Trims, specify model series no., lever design no., function code, cylinder type and BHMA finish code.

For example: **84P-5A-RC-626**