

Exit Device

Wide Stile Designed Rim Type, Light Duty



531 Strike Shim



- Furnished with 532 Strike together. This shim is 1/8" thick for prepare doors with 1/2" stop, it is used to obtain correct distance between the device latch and the surface applied strike when the stop is 1/2" high.
- If the frame has 5/8" stop, then this shim is unnecessary.



532 Panic Rim Strike

- Surface applied. Standard on 5000 Series panic rim devices.
- Stainless steel, with a plated roller.



533 Fire Rim Strike

- Surface applied. Standard on 5000 Series fire rim devices.
- It is 100% stainless steel including a roller.

Model No. 5710

- **5710S:** Panic-Rated Rim Exit Device
- **5710F:** Fire-Rated Rim Exit Device

Applications

- For using on the single or double doors with mullion.
- Fire rated devices must use on 4' x 8' (1219mm x 2438mm) single or 8' x 8' (2438mm x 2438mm) double fire labeled doors.
- It fits for 1-3/4" (44mm) thick standard RHR or LHR hollow metal and wood doors. For others, please specify door thickness when ordering.

Finishes

US3, US20A, US28, US32D

Certification


- Comply with ANSI A156.3 - 2020 Grade 1
- UL 305 Standard for the Panic Exit Hardware
- UL 10C Standard for the Fire Exit Hardware

Specifications

Device Lengths	Short (36"): 32-11/16" (830mm) for 3' door use with short push bar Long (48"): 44-23/32" (1136mm) for 4' door use with long push bar
Minimum Stile Width	3-1/2" (90mm)
Latch Bolt	11/16" (17mm) throw, Deadlocking type, Stainless steel
Deadlocking Latching	5/8" (16mm) throw, Stainless steel
Strikes	531 & 532 (panic rated), 533 (fire rated)
Dogging Kit	Panic device - Hex key dogging standard (Allen-type key furnished) Fire device - No mechanical dogging (Dogging device is not permitted on fire-rated exit device.)
Dogging Options	Cylinder Dogging (CD), Less Dogging (LD)
Mounting Fasteners	Machine screws furnished standard Sex Nut and Bolt (SNB) are required to use for wood doors. Order SNB separately.
Head Cover	Stainless steel, or Nonferrous alloy
Chassis	Steel, plated
Mechanism Housing	Steel, or Stainless steel

General Description

- The device lengths are precut for 36" and 48" (standard size) wide door use. No additional cutting is necessary.
- The standard vertical rod accommodates 7' or 8' exit doors. Specify the door height if it is greater than the standard size. A longer top rod is available to be furnished if necessary.
- For narrow door installation, cut device "A" portion to door width minus 2" minimum to fit properly.

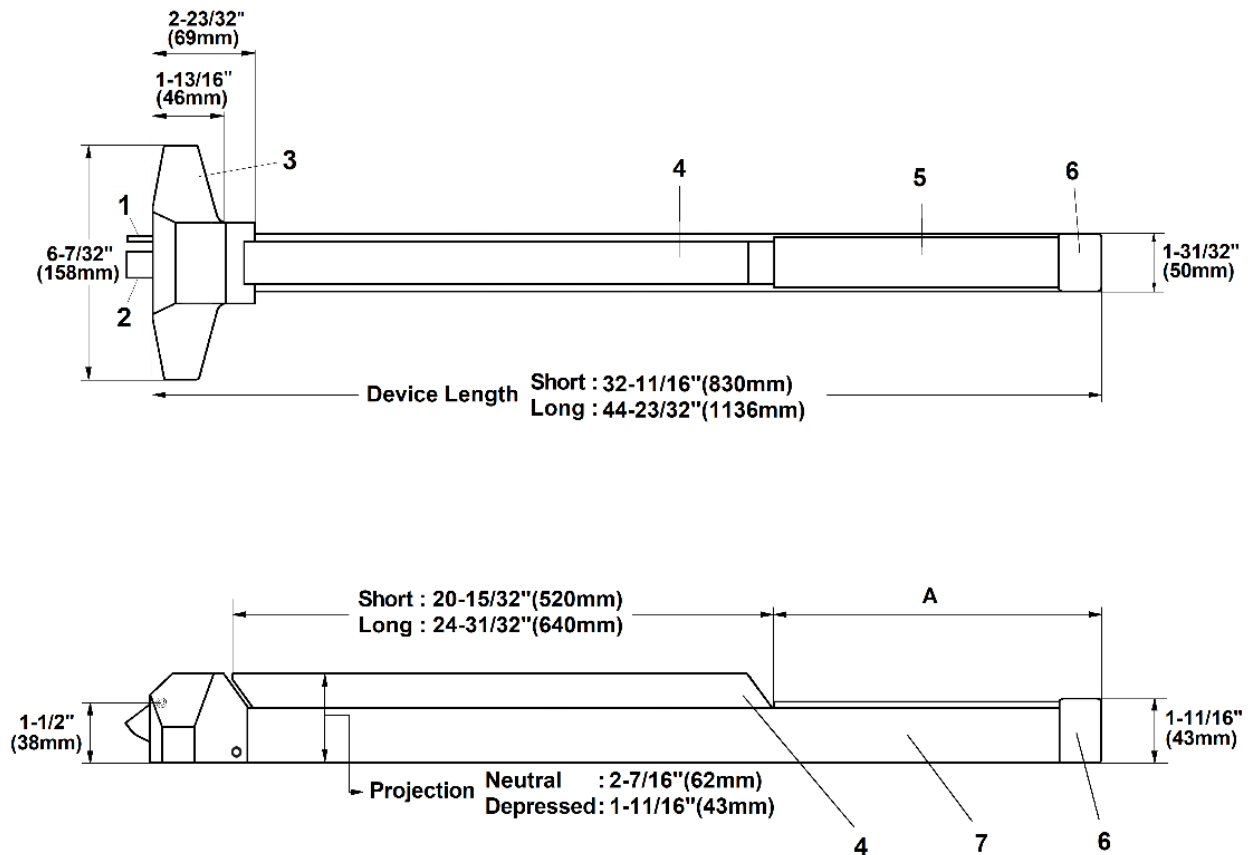

No.	Part Name
1	Auxiliary Guarded Latch
2	Latch Bolt
3	Chassis Cover (Head Cover)
4	Push Bar
5	Dogging Plate
6	End Cap
7	Mechanism Housing