

KEYED REMOVABLE MULLIONS

7000 Series

Applications


- 7000 Series keyed removable mullions are for use with 5000 and 8000 Series Rim Exit Devices on non-fire or fire rated pairs of doors.
- They are designed for faster and easily removing from the top bracket by a simple operation of the rim cylinder when a clear, unobstructed large opening is required.
- Once the mullion is removed, the cart, gurneys, large machine, forklift, or furniture can freely pass through the opening.
- When the mullion is re-installed, the unit will self-lock in place without use of a cylinder key.
- Each keyed removable mullion set includes top and bottom bracket set, mullion tube, shims, but not includes a rim cylinder.
- Fire-rated mullion is certified by UL.

KEYED REMOVABLE MULLIONS

NON-FIRE RATED MULLION

Model No. 7100

- For use with panic-rated rim exit devices on non-fire pairs of doors

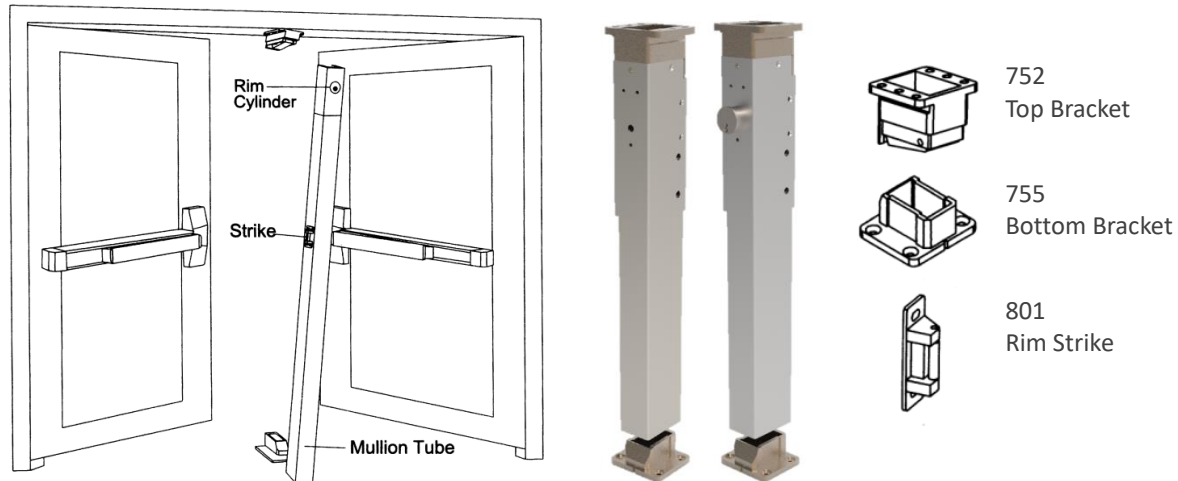

Specifications


Mullion Size	7' (2134mm), 8' (2438mm) or 10' (3048mm) Mullion may be field cut to fit proper size
Mullion Tube	2" (51mm) wide x 3" (76mm) deep With wall thickness of 1/8" (3mm), 11 Gauge Steel Tube
Rim Cylinder	No. 426 : a 1-1/4" solid brass 6-pin rim cylinder No. 308 : an interchangeable core Sold separately.
Top Bracket	Steel. Using key allows the mullion to be removed in seconds Mullion can be locked in the top bracket easily without using the key
Bottom Bracket	Steel. Fixed by 4 hex bolts with nonferrous anchors
Shims	1/2"(13mm) and 5/8"(16mm) shims included
Strike	Use 2 standard Rim Strike (No. 801), not included
Fasteners	Each Mullion includes: 2 Flat Head Machine Screws, 5/16"-18 x 1-1/2", plated steel 4 Flat Head Machine Screws, 5/16"-18 x 5/8", plated steel 4 Hex Head Machine Screws, 5/16"-18 x 1-1/4", plated steel 4 Expansion Anchors, 5/8" dia. X 7/8" long, nonferrous alloy
Finish	Gary baked powder coating only

KEYED REMOVABLE MULLIONS

FIRE RATED MULLION

Model No. 7200

- For use with fire-rated rim exit devices on fire-rated pairs of doors.

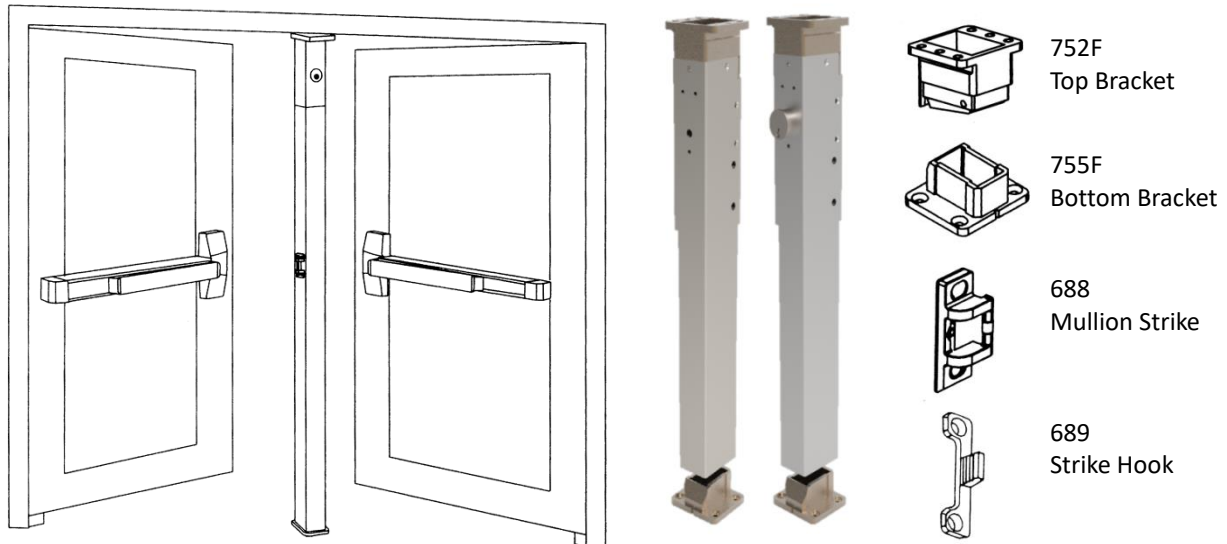

Specifications

Mullion Size	7' (2134mm) and 8' (2438mm) 2 sizes Mullion may be field cut to fit proper size
Mullion Tube	2" (51mm) wide x 3" (76mm) deep With wall thickness of 1/8" (3mm), 11 Gauge Steel Tube
Rim Cylinder	No. 426 : a 1-1/4" solid brass 6-pin rim cylinder No. 308 : an interchangeable core Sold separately.
Top Bracket	Stainless Steel. Using key allows the mullion to be removed in seconds Mullion can be locked in the top bracket easily without using the key
Bottom Bracket	Stainless Steel. Fixed by 4 hex bolts with stainless steel anchors
Shims	1/2"(13mm) and 5/8"(16mm) shims included
Strike	Use 2 sets of Mullion Strikes (688) and Strike Hooks (698), sold separately.
Fasteners	Each Mullion includes: 2 Flat Head Machine Screws, 5/16"-18 x 1-1/2", stainless steel 4 Flat Head Machine Screws, 5/16"-18 x 5/8", stainless steel 4 Hex Head Machine Screws, 5/16"-18 x 1-1/4", stainless steel 4 Expansion Anchors, 1/2" dia. X 1-1/2" long, steel
Finish	Gary baked powder coating only

