



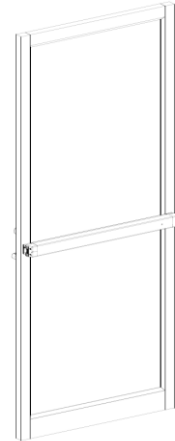

STOREFRONT ALUMINUM DOOR EXIT DEVICE Model No. 9610S

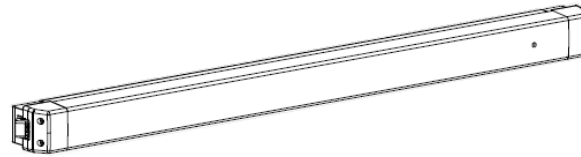

Certification

UL/cUL Listed : UL listed as Panic Exit Hardware

Applications

- 9610S narrow design rim exit devices are for the aluminum frame full glass doors or narrow stile aluminum doors applications.
- The exit devices are available in 628, 670, and 711 finishes.

Specifications

Device Lengths	Short (36"): 35-1/16" (891mm) Long (48") : 47-1/16" (1196mm)
Door Widths	36" - For 34-3/16" to 36" (868mm to 908mm) door size 48" - For 46-3/16" to 48" (1173mm to 1213mm) door size
Minimum Stile Width	2" (51mm)
Latch Bolt	7/16" (10.7mm) throw, pullman latch design
Strike	Blade stop strike (Panic rated only)
Dogging Kit	Hex dogging only
Mounting Fasteners	Machine screws furnished standard. Optional SNB are available for device. Order SNB separately.
Mounting Height	Device centerline from finished floor is 40" (1016mm) standard
Projection	Push bar neutral: 2-9/16" (65mm) Push bar depressed: 2-1/8" (54mm)

Dimension

