


WIDE STILE EXIT DEVICES

3-POINT LATCHING EXIT DEVICE

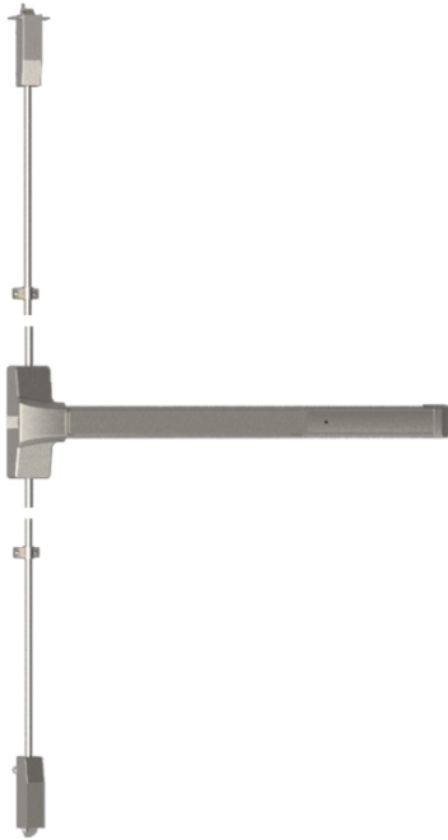

Model No. 8660 & 8860

- 8660S/8860S : Panic-Rated Exit Device
- 8660F/8860F : Fire-Rated Exit Device

Applications

- Panic rated devices are for all types of single and double doors.
- Fire rated devices are used for UL listed fire labeled pairs of doors up to 8'x8' (2438mm x 2438mm). Specify when ordering if door height is over 8'.

Quiet Solution (Optional)

Specify "Quiet Solution" when ordering.

Finishes

US3, US4, US10, US10B, US15, US26, US26D, US32D

Certifications

- ANSI A156.3 - 2020 Grade 1
- UL 305 Standard for Panic Exit Hardware
- UL 10C Standard for Fire Exit Hardware

Specifications

Device Lengths	Short (36"): 33-5/32" (842mm) ; Long (48"): 45-1/8" (1146mm)
Door Widths	36" - For 29" to 36" (736mm to 914mm) door size 48" - For 33" to 48" (838mm to 1219mm) door size
Minimum Stile Width	4-1/4" (107mm)
Latch Bolts	Top latch 5/8" (16mm) throw, can be automatically deadlocked Middle latch 3/4" (19mm) throw, stainless steel Bottom latch 5/8" (16mm) throw, held in retracted position during door swing
Strikes	Top - 812 (panic), 822 (fire); Middle - 801 (panic), 802(fire); Bottom - 815 (panic), 825 (fire)
Dogging Kit	Panic device - Hex key dogging standard (RD) Fire device - No mechanical dogging (ND)
Dogging Options	Cylinder Dogging (CD), Less Dogging (LD)
Mounting Fasteners	Panic device - Machine screws furnished as standard SNB furnished for the top & bottom latches Fire device - Sex nuts and bolts (SNB) supplied as standard For wood doors - SNB are required; order SNB separately
Mounting Height	From finished floor to device centerline – 40 inches (1016mm) standard
Vertical Rods	Rods - 1/2" (13mm) diameter tubular with guides Top rod - two pieces, fits 7' or 8' door heights Bottom rod - single piece, 31-1/4" (794mm) in length