


WIDE STILE EXIT DEVICES

SURFACE VERTICAL ROD EXIT DEVICES & LBR TYPE



* LBR configuration is not available for 5530S and 5730F.

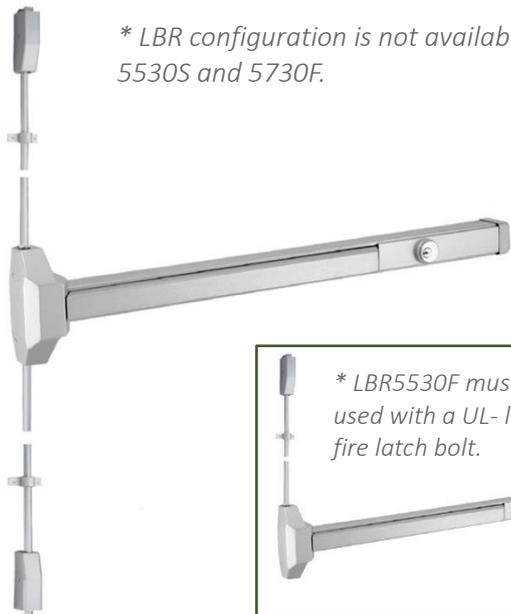

* LBR5530F must be used with a UL-listed fire latch bolt.



534 Top Strike

- Surface-applied to the stop
- Hardened steel, plated



537 Bottom Strike

- Surface-applied to the floor
- Plated nonferrous alloy

Model No. 5530 or 5730

- 5530S: Panic-Rated SVR Exit Device
- 5530F: Fire-Rated SVR Exit Device
- LBR5530F: Fire-Rated Less Bottom Rod Type
- 5730S: Panic-Rated SVR Exit Device
- 5730F: Fire-Rated SVR Exit Device
- LBR5730S: Panic-Rated Less Bottom Rod Type

Applications

- Designed for use on all single or double doors where two-point latching is required (especially for the inactive leaf of a double door).
- Fire-rated models must be used on UL-labeled fire doors:
 - ♦ Single doors: 4' x 8' (1219mm x 2438mm)
 - ♦ Double doors: 8' x 8' (2438mm x 2438mm)
- Fits standard 1-3/4" (44mm) thick RHR or LHR hollow metal or wood doors.
 - ♦ For non-standard thicknesses, please specify door thickness when ordering.

Finishes

US20A, US28

US32D - SS (Complies with A156.18)

Certification

- UL 305 Standard for the Panic Exit Hardware
- UL 10C Standard for the Fire Exit Hardware
- ANSI A156.3 - 2020 Grade 1 (5730 & LBR5730 only).

Specifications

Device Lengths	Short (36"): 32-11/16" (830mm) Long (48"): 44-23/32" (1136mm)
Minimum Stile Width	3-1/2" (90mm)
Latch Bolt	11/16" (17mm) throw, deadlocking type
Strikes	534 (Top), 537 (Bottom)
Dogging Kit	Panic-rated device - Hex key dogging standard Fire-rated device - No mechanical dogging
Dogging Options	Cylinder Dogging (CD), Less Dogging (LD)
Mounting Fasteners	Machine screws furnished standard Sex Nuts and Bolts (SNB) required for wood doors. Order SNB separately.
Head Cover	Stainless steel or nonferrous alloy
Chassis	Plated steel
Mechanism Housing	Steel or stainless steel
Push bar & End Cap	Steel or stainless steel